


HDT Variable Resistor VARI 320

- ▶ Continuously Adjustable Variable Resistor
- ▶ Power up to 320 VA
- ▶ Stable metal housing
- ▶ 4 mm safety sockets with additional Earth Connector
- ▶ For schools, vocational schools, electronic laboratories, test laboratories, repair shops etc.

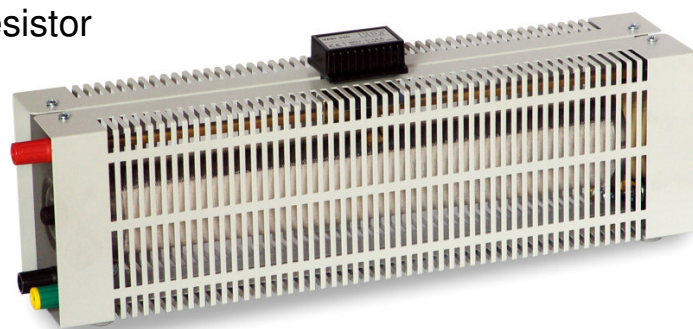

Technical Datas

Range 10 Ω / 33 Ω / 100 Ω / 330 Ω / 1000 Ω / 3300 Ω

Tolerance ± 10 %

Load	Value	durable	15 min
	VARI 320 – 10 Ω	5,7 A	8 A
	VARI 320 – 33 Ω	3,1 A	4,4 A
	VARI 320 – 100 Ω	1,8 A	2,5 A
	VARI 320 – 330 Ω	1,0 A	1,4 A
	VARI 320 – 1000 Ω	0,57 A	0,8 A
	VARI 320 – 3300 Ω	0,31 A	0,44 A

Insulation Resistor > $3 \times 10^7 \Omega$

Earth Resistance < 0,1 Ω

Max Voltage max. 600 V AC/DC

Dielectric Voltage > 2500 V~

Protection Class IP 20

Standard EN 61010, IEC 61010

Dimension approx. 446 x 93 x 150 mm

Weigth approx. 2,85...3,25 kg

Scope of Supply

1 St. HDT Variable Resistor VARI 320

1 St. Instruction Manual

Order Informations

Cat. No.	Description	
15010	HDT variable resistor VARI 320 – 10 Ω	
15020	HDT variable resistor VARI 320 – 33 Ω	
15030	HDT variable resistor VARI 320 – 100 Ω	
15040	HDT variable resistor VARI 320 – 330 Ω	
15050	HDT variable resistor VARI 320 – 1000 Ω	
15060	HDT variable resistor VARI 320 – 3300 Ω	